


stick

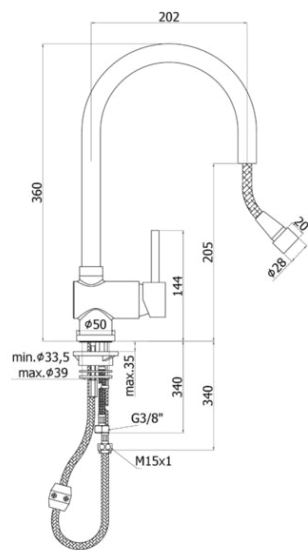

- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8" G
- 1 stainless steel hose M15x1
- 1/2"-M15x1 / L.1500mm nylon hose with ecological weight
- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8" G
- 1 stainless steel hose M15x1
- 1/2"-M15x1 / L.1500mm nylon hose with ecological weight

SK 185
CR- Chrome | Chrome
ST- Steel looking finish | Steel looking finish

ARTICOLO ARTICLE

- SK 185..**
- with (single spray) metal pull out hand-shower
 - with (single spray) metal pull out hand-shower

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		4.48	6.32	7.87	9.14	10.24	11.25	12.17	13.09	13.87	14.67


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 185



stick

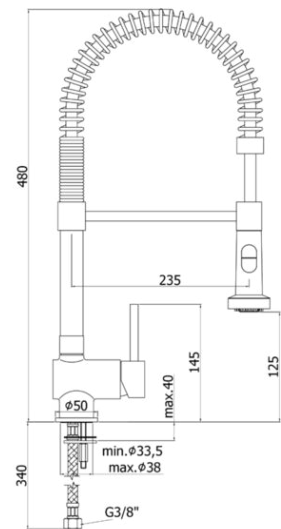

- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8"G
- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8"G

ARTICOLO ARTICLE

SK 176..

- Professional
- with Happy (two-spray) ABS hand-shower
- Professional
- with Happy (two-spray) ABS hand-shower

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)	getto normale - normal jet	3.72	5.71	7.2	8.51	9.54	10.46	11.38	12.25	13.06	13.7
	getto pioggia - rain jet	3.25	5.06	6.31	7.42	8.35	9.26	10.04	10.8	11.47	12.12


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 176



stick

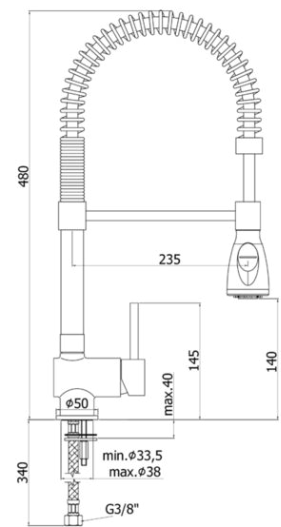

- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8"G
- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8"G

ARTICOLO ARTICLE

SK 177..

- Professional
- with Bombata (two-spray) ABS hand-shower
- Professional
- with Bombata (two-spray) ABS hand-shower

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
Uscita outlet		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)	getto normale - normal jet	4.71	5.98	7.52	8.76	9.82	10.67	11.54	12.61	13.24	13.97
	getto pioggia - rain jet	3.65	5.31	6.55	7.64	8.59	9.46	10.25	10.9	11.6	12.21


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 177



stick

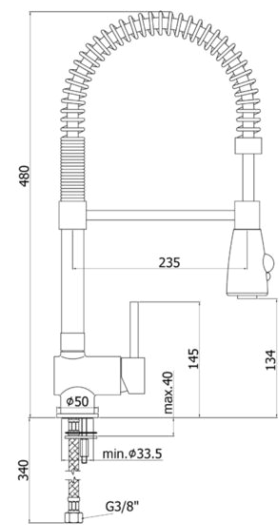

- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8" G
- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8" G

ARTICOLO ARTICLE

SK 178..

- Professional
- with Lux (two-spray) ABS hand-shower
- Professional
- with Lux (two-spray) ABS hand-shower

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
Uscita outlet		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)	getto normale - normal jet	3.96	5.93	7.47	8.66	9.76	10.63	11.56	12.44	13.28	14
	getto pioggia - rain jet	3.96	6.01	7.42	8.75	9.8	10.83	11.79	12.68	13.42	14.18


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 178



stick

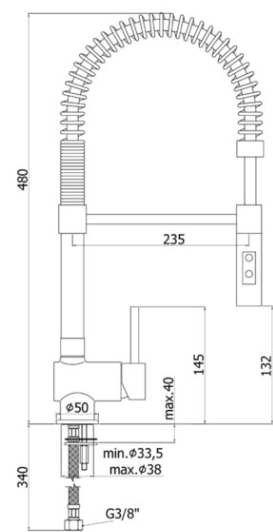

- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8"G
- One-hole sink mixer with swivelling spout complete with:
- set of 2 stainless steel hoses 3/8"G

ARTICOLO ARTICLE

SK 179..

- Professional
- with Minimal (two-spray) ABS hand-shower
- Professional
- with Minimal (two-spray) ABS hand-shower

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)	getto normale - normal jet	3.34	4.89	6.08	7.02	7.88	8.66	9.38	10.11	10.63	11.25
	getto pioggia - rain jet	3.03	4.47	5.6	6.47	7.27	7.97	8.66	9.26	9.86	10.46


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 179



stick

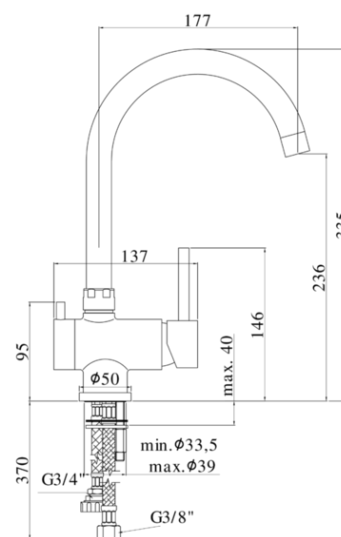

- One-hole sink mixer with swivelling spout complete with:
- aerator M22x1
- set of 2 stainless steel hoses 3/8"G
- 1 stainless steel hose 3/4"G

- One-hole sink mixer with swivelling spout complete with:
- aerator M22x1
- set of 2 stainless steel hoses 3/8"G
- 1 stainless steel hose 3/4"G

ARTICOLO ARTICLE

SK 184..

- with dishwasher machine connection
- with dishwasher machine connection

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		6.16	8.85	11.02	12.73	14.32	15.7	17.03	18.22	19.39	20.47


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 184



stick

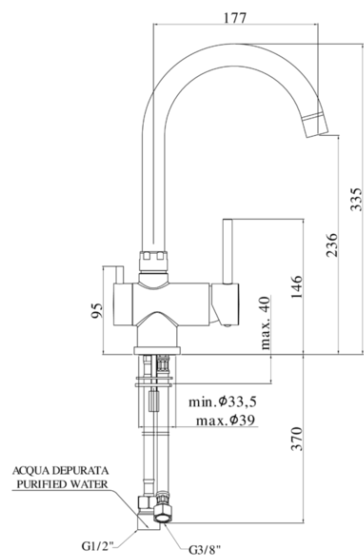

- One-hole sink mixer with swivelling spout complete with:
 - aerator M22x1
 - set of 2 stainless steel hoses 3/8"G
 - 1 stainless steel hose 1/2"G
- One-hole sink mixer with swivelling spout complete with:
 - aerator M22x1
 - set of 2 stainless steel hoses 3/8"G
 - 1 stainless steel hose 1/2"G

ARTICOLO ARTICLE

SK 190..

- 3rd inlet for purified water
- 3rd inlet for purified water

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		6.16	8.85	11.02	12.73	14.32	15.7	17.03	18.22	19.39	20.47

DOCUMENTI TECNICITECHNICAL DOCUMENTS




ESPLOSO
RICAMBI
SK 190

SK 190
CR- Chrome | Chrome
ST- Steel looking finish | Steel looking finish



stick

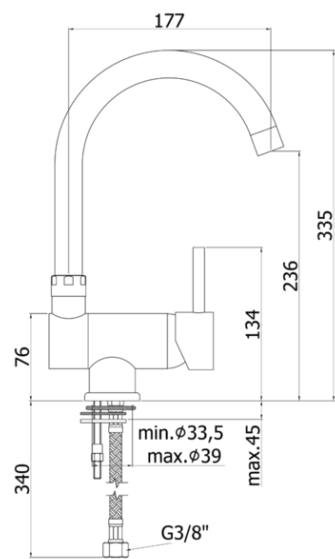

- One-hole sink mixer with swivelling spout complete with:
- aerator M22x1
- set of 2 stainless steel hoses 3/8"G
- One-hole sink mixer with swivelling spout complete with:
- aerator M22x1
- set of 2 stainless steel hoses 3/8"G

ARTICOLO ARTICLE

- SK 189..
- with reclining spout
 - minimum height for windows opening 76mm
 - with reclining spout
 - minimum height for windows opening 76mm

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
	Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		6.2	8.9	10.92	12.62	14.14	15.53	16.74	17.97	19.04	20.1


DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 189



stick

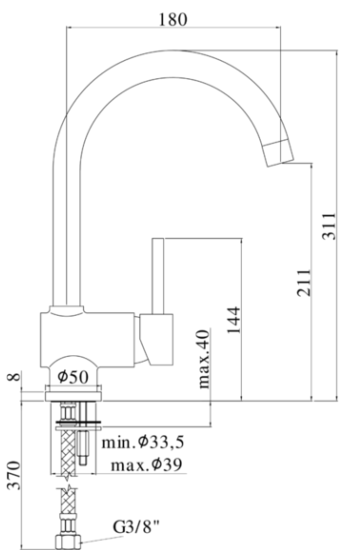

- One-hole sink mixer complete with:
- aerator M22x1F
- set of 2 stainless steel hoses 3/8"G
- One-hole sink mixer complete with:
- aerator M22x1F
- set of 2 stainless steel hoses 3/8"G

ARTICOLO ARTICLE

SK 180..

- with swivelling spout
- with swivelling spout

RAPPORTO PROVA PORTATA FLOW RATE REPORT

		Pressione / Pressure (bar)									
Uscita outlet		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		5.61	7.78	9.47	10.88	12.1	13.5	14.59	15.45	16.55	17.06

DOCUMENTI TECNICITECHNICAL DOCUMENTS



ESPLOSO
RICAMBI
SK 180

